

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number  
**WO 2004/108041 A1**

(51) International Patent Classification<sup>7</sup>: **A61F 13/496**

(21) International Application Number:  
**PCT/US2004/008432**

(22) International Filing Date: 19 March 2004 (19.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/449,988 30 May 2003 (30.05.2003) US

(71) Applicant (for all designated States except US): **KIMBERLY-CLARK WORLDWIDE INC.** [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VEITH, Jerome, Steven** [US/US]; 1260 Southfield Drive, Menasha, WI 54952 (US). **VAN GOMPEL, Paul** [US/US]; W9029 School Road, Hortonville, WI 54644 (US).

(74) Agents: **CONNELLY, Thomas, J. et al.**; Kimberly-Clark Worldwide, Inc., 401 N. Lake Street, Neenah, WI 54956 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A DISPOSABLE ABSORBENT ARTICLE AND METHOD OF FORMING THE ARTICLE

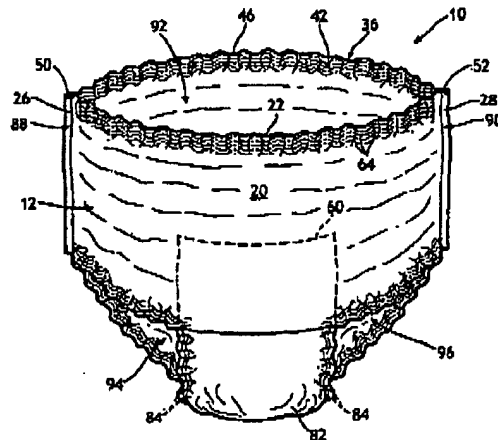

(57) Abstract: A disposable absorbent article and method of forming the article are disclosed. The article has front and back panels, each having first and second zones. The first zone of each panel is extensible and retractable and the second zone of each panel is non-extensible and non-retractable. Each of the front and back panels has first and second side edges. An absorbent assembly is secured to the front and back panels. The absorbent assembly has a first end secured to the second zone of the front panel and a second end secured to the second zone of the back panel. The absorbent assembly is capable of being folded to enable the first and second side edges of the front panel to align with the first and second side edges of the back panel, respectively. A pair of seams join the front and back panels together at the first and second side edges to form a disposable absorbent article having a waist opening and a pair of leg openings.

WO 2004/108041 A1

**PCT/US2004/008432**

## BACKGROUND OF THE INVENTION

25           Now a disposable absorbent article for absorbing human exudate has been  
invented that allows the front and back elastic panels to extend and retract without  
causing the absorbent assembly to move in a similar fashion thereby providing a better fit  
to the user's body.

Briefly, this invention relates to a disposable absorbent article for absorbing human exudate and a method of forming the article. The disposable absorbent article includes a front panel and a back panel with each having a first zone and a second zone. The first zone is extensible and retractable and the second zone is non-extensible and non-

WO 2004/108041

PCT/US2004/008432

retractable. Each of the front and back panels also has an inner surface and first and second side edges. The second zone of each panel is spaced inward from the first and second side edges. An absorbent assembly bridges across and is secured to the front and back panels. The absorbent assembly includes a liquid pervious bodyside liner, a liquid-impervious outer cover and an absorbent positioned therebetween. The absorbent assembly has a first end and a second end. The first end is secured to the second zone of the front panel and the second end is secured to the second zone of the back panel. The absorbent assembly is capable of being folded to enable the first and second side edges of the front panel to align with the first and second side edges of the back panel, respectively. A pair of seams join the front and back panels together at the first and second side edges to form a disposable absorbent article having a waist opening and a pair of leg openings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15

Fig. 1 is a perspective view of a disposable absorbent article.

Fig. 2 is a top view of the spaced apart front and back panels showing the first and second zones.

Fig. 3 is a plane view of a disposable absorbent article showing an absorbent assembly secured to the inner surfaces of the front and back panels and showing a partial cut away view of the construction of the absorbent assembly.

Fig. 4 is a side view of the disposable absorbent article shown in Fig. 3.

Fig. 5 is a cross-sectional view of the disposable absorbent article shown in Fig. 3 taken along line 5-5.

Fig. 6 is a cross-sectional view of the disposable absorbent article shown in Fig. 3 taken along line 6-6.

Fig. 7 is a flow diagram of a method used to manufacture the disposable absorbent article of this invention.

30

#### DETAILED DESCRIPTION

Referring to Fig. 1, a disposable absorbent article 10 is depicted. The disposable absorbent article 10 is intended to be worn by persons, including infants, toddlers, or adults, and is designed for a single or temporary use. The disposable absorbent article 10 is meant to be disposed of after being used once instead of being laundered or dry

WO 2004/108041

PCT/US2004/008432

cleaned for re-use. The term "disposable absorbent article" is herein defined to mean an absorbent article that is inexpensive and can be discarded by the consumer once it becomes soiled or otherwise unusable after a single use or after a few uses. In the context of disposable personal care absorbent articles, such articles are normally disposed of after they are soiled and are not meant to be laundered or treated for re-use and are distinguishable from limited use articles that can be used several times before being discarded, such as disposable razors and cigarette lighters. The disposable absorbent article 10 is designed to be pulled up around the user's torso without having to first open the article 10 in order to place it on a person's body. In Fig. 1, the disposable absorbent article 10 is shown as it would appear just prior to being pulled up around a user's torso.

Referring to Figs. 2-4, the disposable absorbent article 10 has a longitudinal central axis X-X, a transverse central axis Y-Y, and a vertical central axis Z-Z. The disposable absorbent article 10 includes a front panel 12 having a first zone 14 and a second zone 16. The first zone 14 is extensible and retractable in at least one direction. Desirably, the first zone 14 is extensible and retractable in two or more directions. When the first zone 14 is extensible and retractable in only one direction, that direction should be approximately parallel to the transverse central axis Y-Y of the disposable absorbent article 10. The second zone 16 is non-extensible and non-retractable. The second zone 16 can be of any geometrical configuration but a rectangular or square configuration works well. The second zone 16 has a surface area that is smaller than the surface area of the first zone 14. Desirably, the second zone 16 has a surface area that is less than about 25% of the surface area of the first zone 14. More desirably, the second zone 16 has a surface area that is less than about 20% of the surface area of the first zone 14. Most desirably, the second zone 16 has a surface area that is less than about 15% of the surface area of the first zone 14.

Still referring to Figs. 2-4, the front panel 12 also includes an inner surface 18 and an outer surface 20. The inner surface 18 is in direct contact with the user's skin and is sometimes referred to as the bodyside surface. The outer surface 20 is situated opposite to the inner surface 18 and is spaced away from the skin of the user. The outer surface 20 is sometimes referred to as the garment facing surface since it can be in direct contact with the inner surfaces of the user's outer clothing.

Referring to Fig. 2, the front panel 12 further includes a first end 22, a second end 24, a first side edge 26 and a second side edge 28. The overall size and shape of the front panel 12 can vary to suit the size and anatomy of the actual user. For example, the

WO 2004/108041

PCT/US2004/008432

front panel 12 of an infant diaper will be smaller than the front panel 12 of an adult incontinence garment. The first and second zones, 14 and 16 respectively, can be integrally formed from a single material or they can be formed from separate and distinct materials. The second zone 16 is spaced inward from the first and second side edges 26 and 28. The second zone 16 is also shown having an edge that is coterminuous with the second end 24 of the front panel 12. The second zone 16 is located adjacent to or in an abutting relationship to the first zone 14. However, the second zone 16 should not overlay or be covered by any portion of the first zone 14. Desirably, the second zone 16 is surrounded on three sides by the first zone 14, as is shown in Fig. 2.

10 The front panel 12 can be formed from a material that is extensible and retractable in at least one direction. By "extensible" it is meant a material that is capable of being stretched, extended or elongated when a force, such as pulling, is applied to it. By "retractable" it is meant a material that is capable of quickly recovering, retracting or returning to substantially its pre-stretched, pre-extended dimension once the force used to  
15 extend the material has been removed. Because of hysteresis, a material might not be able to fully recover or return to its original pre-stretched length. Some materials might be extensible but are not retractable. For example, many conventional textile and non-woven materials, that lack an elastic component, are extensible but lack retractability to return rapidly to substantially their pre-stretched dimension. Such materials, including but not  
20 limited to, a cotton knit T-shirt material or blends of cotton and non-elastic synthetic fibers can be extended but are not considered retractable for the purposes of this invention unless some elasticizing material, agent or treatment is added.

The front panel 12 can be formed from an elastomeric material. An elastomeric material can be a single elastic sheet or layer, an elastic film, an elastic net-like material, a  
25 plurality of elastic strands arranged to form an elastic layer, an elastic laminate, etc. When a plurality of elastic strands is utilized, they can be positioned on at least one layer of woven or non-woven material. When an elastic laminate is used, it can consist of two or more layers bonded together by heat, pressure, heat and pressure, adhesives, ultrasonics, or a combination of any of the above. Other means of securing one or more  
30 layers together to form a laminate structure are known to those skilled in the art. In a laminate, only one of the layers needs to be an elastomeric layer.

Referring now to Figs. 3 and 4, the front panel 12 is shown being formed as a three-layer laminate structure. The front panel 12 includes a first layer 30, a second or middle layer 32, and a third layer 34. The first and third layers, 30 and 34 respectively,  
35 are the outer layers and can be formed from the same material or from different materials.

WO 2004/108041

PCT/US2004/008432

The first and third layers, 30 and 34 respectively, can be constructed from natural or synthetic fibers and can be a woven or non-woven material. The second or middle layer 32 has the elastic properties and is sandwiched between the first and third layers, 30 and 34 respectively. It should be noted that one or both of the outer layers 30 or 34 can be  
5 made from an elastic material, if desired.

The extensible and retractable properties of the first zone 14 of the front panel 12 can be in one direction but desirably are in two or more directions. More desirably, the extensible and retractable properties of the first zone 14 are in a direction approximately parallel to the transverse central axis Y-Y. The transverse direction extends laterally  
10 across the torso of the user of the disposable absorbent article 10 and extends from one hip bone to the other hip bone. Even more desirably, the extensible and retractable properties of the first zone 14 are in at least two directions, one direction being approximately parallel to the longitudinal central axis X-X and the other direction being approximately parallel to the transverse central axis Y-Y. Most desirably, the extensible  
15 and retractable properties of the first zone 14 are in multiple directions, or stated another way, in three or more directions extending over an arc of 360 degrees. The ability of the first zone 14 to extend and retract will provide the requisite force needed during use of the disposable absorbent article 10 to ensure that it snugly conforms to the anatomy of the wearer's torso.

20 The front panel 12 can be constructed from various materials. One suitable material is a stretch bonded laminate (SBL) where the elastic core or middle layer 32 is elongated before the two outer nonwoven layers 30 and 34 are attached. Exemplary SBL materials are described in U.S. patent 4,720,415 which is hereby incorporated by reference and made a part hereof. Another suitable material for the front panel 12 is a  
25 necked bonded laminate (NBL). The NBL material is also a three-layer laminate but the elastic core or middle layer 32 is not pre-stretched prior to being attached to the two outer nonwoven layers 30 and 34. Instead, the outer layers 30 and 34 are necked stretched before the elastic core or middle layer 32 is attached to them. Exemplary NBL materials are described in U.S. patent 5,336,545 which is hereby incorporated by reference and  
30 made a part hereof. Other examples of elastomeric materials that can be used for the front panel 12 include a continuous filament stretch bonded laminate (CFSBL), a vertical filament laminate (VFL), a necked stretch bonded laminate (NSBL) and a necked thermal laminate (NTL). Combinations of the above materials can also be used. Exemplary CFSBL materials are described in U.S. patent 5,385,775 which is hereby incorporated by  
35 reference and made a part hereof.

WO 2004/108041

PCT/US2004/008432

Furthermore, the front panel 12 can be constructed from an elastic film that is capable of being stretched in at least one direction. Desirably, the front panel 12 can be stretched in both the machine direction (approximately parallel to the longitudinal central axis X--X) and the cross-direction (approximately parallel to the transverse central axis Y--Y). The front panel 12 can also be formed from an elastic nonwoven that has a machine direction stretch and/or a cross-direction stretch.

Still further, the front panel 12 can be formed from two outer layers 30 and 34 with a plurality of elastic strands sandwiched therebetween. The elastic strands can be formed from LYCRA®. LYCRA® is a registered trademark of E. I. Du Pont De Nemours & Co., having an office at 1007 Market Street, Wilmington, Delaware 19898. The elastic strands can be aligned approximately parallel to one another or be angled or skewed relative to one another. The elastic strands can also be uniformly or randomly spaced apart from one another. The elastic strands can vary in shape, size, configuration, and/or length. The diameter and/or cross-sectional configuration of the elastic strands, the decitex (weight in grams per 10,000 meters of a strand) of the elastic strands, and the tension imparted into the elastic strands can all be varied to suit one's particular product needs. The elastic strands can have a round, semi-circular, square, rectangular, oval or some other geometrical configuration. The elastic strands can overlap, intersect or crisscross at least one other elastic strand. The various ways of positioning, orienting, and adhering the elastic strands to the two outer layers 30 and 34 are well known to those skilled in the art.

It should be noted that the front panel 12 can also be constructed from a material that is substantially air permeable, if desired. Alternatively, the front panel 12 can be constructed from a material that is substantially air impermeable.

The front panel 12 can be formed from a single integral elastomeric material that exhibits both extensible and retractable characteristics. The material can then be treated, fused, deadened, chopped, conditioned or somehow altered so as to form the second zone 16. The elastic properties of the material can be deadened before, during or after the material is stretched. Hammering the material between two hardened surfaces can cause the material to lose its extensible and retractable properties in a given area. The material can also be treated with heat, pressure, heat and pressure, ultrasonics, chemicals, by mechanical means, or a combination of the above to remove its ability to elongate and retract. In this fashion, the second zone 16 can be formed. Alternatively, the second zone 16 can be a separated material that does not possess any extensible

WO 2004/108041

PCT/US2004/008432

and retractable properties. In this case, the second zone 16 is secured to the first zone 14 in order to construct the front panel 12.

Referring again to Fig. 2, one can see that the first zone 14 of the front panel 12 encloses three sides of the second zone 16. Likewise, the first zone 38 of the back panel 36 encloses three sides of the second zone 40. This construction ensures that the second zones 16 and 40 are situated adjacent to an end, 24 or 48 respectively, of the front and back panels, 12 and 36 respectively.

Referring again to Figs. 2-4, the disposable absorbent article 10 also includes a back panel 36 which is spaced apart, discontinuous and distinct from the front panel 12. The back panel 36 has a first zone 38 and a second zone 40. The first zone 38 is extensible and retractable in at least one direction. Desirably, the first zone 38 is extensible and retractable in two or more directions. When the first zone 38 is extensible and retractable in only one direction, that direction should be approximately parallel to the transverse central axis Y-Y of the disposable absorbent article 10. The second zone 40 is non-extensible and non-retractable. The second zone 40 can be of any geometrical configuration but a rectangular or square configuration works well. The second zone 40 has a surface area that is smaller than the surface area of the first zone 38. Desirably, the second zone 40 has a surface area that is less than about 30% of the surface area of the first zone 38. More desirably, the second zone 40 has a surface area that is less than about 25% of the surface area of the first zone 38. Most desirably, the second zone 40 has a surface area that is less than about 20% of the surface area of the first zone 38.

It should be noted that the second zone 40 of the back panel 36 has a larger surface area than the second zone 16 of the front panel 12. One reason for this is that the front panel 12 usually has a smaller overall surface area than the back panel 36. The back panel 36 is typically larger in size for it has to cover the buttocks of the user.

Still referring to Figs. 2-4, the back panel 36 also includes an inner surface 42 and an outer surface 44. The inner surface 42 is in direct contact with the user's skin and is sometimes referred to as the bodyside surface. The outer surface 44 is situated opposite to the inner surface 42 and is spaced away from the skin of the user. The outer surface 44 is sometimes referred to as the garment facing surface since it can be in direct contact with the inner surfaces of the user's outer clothing.

The back panel 36 further includes a first end 46, a second end 48, a first side edge 50 and a second side edge 52. The overall size and shape of the back panel 36 can vary to suit the size and anatomy of the actual user. For example, the back panel 36 for an infant diaper will be smaller than the back panel 36 for an adult incontinence garment.



WO 2004/108041

PCT/US2004/008432

The first and second zones, 38 and 40 respectively, of the back panel 36 can be integrally formed from a single material or they can be formed from separate and distinct material. The second zone 40 is spaced inward from the first and second side edges 50 and 52. The second zone 40 is also shown having an edge that is coterminuous with the second end 48 of the back panel 36. The second zone 40 is located adjacent to or in an abutting relationship to the first zone 38. However, the second zone 40 should not overlay or be covered by any portion of the first zone 38. Desirably, the second zone 40 is surrounded on three sides by the first zone 38, as is shown in Fig. 2.

The back panel 36 can be formed from the same material or from a different material as the front panel 12. The back panel 36 is extensible and retractable in at least one direction. The definitions for "extensible and retractable" are as defined above with reference to the front panel 12. The back panel 36 can be formed from an elastomeric material. An elastomeric material can be a single elastic sheet or layer, an elastic film, an elastic net-like material, a plurality of elastic strands arranged to form an elastic layer, an elastic laminate, etc. When a plurality of elastic strands is utilized, they can be positioned on at least one layer of woven or non-woven material. When an elastic laminate is used, it can consist of two or more layers bonded together by heat, pressure, heat and pressure, adhesives, ultrasonics, or a combination of any of the above. Other means of securing one or more layers together to form a laminate structure are known to those skilled in the art. In a laminate, only one of the layers needs to be an elastomeric layer.

Referring again to Figs. 3 and 4, the back panel 36 is shown being formed as a three-layer laminate structure. The back panel 36 includes a first layer 54, a second or middle layer 56, and a third layer 58. The first and third layers, 54 and 58 respectively, are the outer layers and can be formed from the same material or from different materials. The first and third layers, 54 and 58 respectively, can be constructed from natural or synthetic fibers and can be a woven or non-woven material. The second or middle layer 56 has the elastic properties and is sandwiched between the first and third layers, 54 and 58 respectively. It should be noted that one or both of the outer layers 54 or 58 can be made from an elastic material, if desired.

The extensible and retractable properties of the first zone 38 of the back panel 36 can be in one direction but desirably are in two or more directions. More desirably, the extensible and retractable properties of the first zone 38 are in a direction approximately parallel to the transverse central axis Y-Y. The transverse direction extends laterally across the torso of the user of the disposable absorbent article 10 and extends from one hip bone to the other hip bone. Even more desirably, the extensible and retractable

WO 2004/108041

PCT/US2004/008432

properties of the first zone 38 are in at least two directions, one direction being approximately parallel to the longitudinal central axis X—X and the other direction being approximately parallel to the transverse central axis Y—Y. Most desirably, the extensible and retractable properties of the first zone 38 are in multiple directions, or stated another way, in three or more directions extending over an arc of 360 degrees. The ability of the first zone 38 to extend and retract will provide the requisite force needed during use of the disposable absorbent article 10 to ensure that it snugly conforms to the anatomy of the wearer's torso.

The back panel 36 can be constructed from various materials. One suitable material is a stretch bonded laminate (SBL) where the elastic core or middle layer 56 is elongated before the two outer nonwoven layers 54 and 58 are attached. Another suitable material for the back panel 36 is a necked bonded laminate (NBL). The NBL material is also a three-layer laminate but the elastic core or middle layer 56 is not pre-stretched prior to being attached to the two outer nonwoven layers 54 and 58. Instead, the outer layers 54 and 58 are necked stretched before the elastic core or middle layer 56 is attached to them. Other examples of such elastomeric materials that can be used for the back panel 36 include a continuous filament stretch bonded laminate (CFSBL), a vertical filament laminate (VFL), a necked stretch bonded laminate (NSBL) or a necked thermal laminate (NTL). Combinations of the above materials can also be used.

Furthermore, the back panel 36 can be constructed from an elastic film that is capable of being stretched in at least one direction and, desirably, in both the machine direction (approximately parallel to the longitudinal central axis X—X) and the cross-direction (approximately parallel to the transverse central axis Y—Y). The back panel 36 can also be formed from an elastic nonwoven that has a machine direction stretch and/or a cross-direction stretch.

Still further, the back panel 36 can be formed from two outer layers 54 and 58 with a plurality of elastic strands sandwiched therebetween. The elastic strands can be formed from LYCRA®. LYCRA® is a registered trademark of E. I. Du Pont De Nemours & Co., having an office at 1007 Market Street, Wilmington, Delaware 19898. The elastic strands can be aligned approximately parallel to one another or be angled or skewed relative to one another. The elastic strands can also be uniformly or randomly spaced apart from one another. The elastic strands can vary in shape, size, configuration, and/or length. The diameter and/or cross-sectional configuration of the elastic strands, the decitex (weight in grams per 10,000 meters of a strand) of the elastic strands, and the tension imparted into the elastic strands can all be varied to suit one's particular product needs.

WO 2004/108041

PCT/US2004/008432

The elastic strands can have a round, semi-circular, square, rectangular, oval or some other geometrical configuration. The elastic strands can overlap, intersect or crisscross at least one other elastic strand. The various ways of positioning, orienting, and adhering the elastic strands to the two outer layers 54 and 58 are well known to those skilled in the art.

It should be noted that the back panel 36 can also be constructed from a material that is substantially air permeable, if desired. Alternatively, the back panel 36 can be constructed from a material that is substantially air impermeable.

The back panel 36 can be formed from a single integral elastomeric material that exhibits both extensible and retractable characteristics. The material can then be treated, fused, deadened, chopped, conditioned or somehow altered so as to form the second zone 40. Hammering the material between two hardened surfaces can also cause the material to lose its extensible and retractable properties in a given area. The material can also be treated with heat, pressure, heat and pressure, ultrasonics, chemicals, by mechanical means, or a combination of the above to remove its ability to elongate and/or retract. In this fashion, the second zone 40 can be formed. Alternatively, the second zone 40 can be a separated material that does not possess any extensible and retractable properties. In this case, the second zone 40 is secured to the first zone 38 in order to construct the back panel 36.

Referring again to Figs. 1 and 3-5, the disposable absorbent article 10 also includes an absorbent assembly 60. The absorbent assembly 60 includes a liquid pervious bodyside liner 62, a liquid-impervious outer cover 64, and an absorbent 66 positioned therebetween. A surge layer 68 can be optionally used which is located between the bodyside liner 62 and the absorbent 66. The surge layer 68 can function to rapidly acquire and temporarily retain body fluid, such as urine, before it can be absorbed into the absorbent 66. Desirably, the surge layer 68 is also capable of wicking the body fluid lengthwise and/or widthwise across its surface, as well as directing the body fluid downward in a z-direction (approximately parallel to the vertical axis Z--Z) toward the absorbent 66.

The absorbent assembly 60 has a first end 70, a second end 72, a first side edge 74 and a second side edge 76. Desirably, the absorbent assembly 60 is secured to the inner surface 18 of the front panel 12 approximate the first end 70 by an attachment 78 and is secured to the inner surface 42 of the back panel 36 approximate the second end 72 by an attachment 80. Alternatively, the absorbent assembly 60 could be secured to outer surface 20 of the front panel 12 approximate the first end 70 by the attachment 78

WO 2004/108041

PCT/US2004/008432

and could be secured to the outer surface 44 of the back panel 36 approximate the second end 72 by the attachment 80. The absorbent assembly 60 is secured to the front and back panels, 12 and 36 respectively, either before or after each panel 12 and 36 has been stretched a predetermined amount. By attaching the absorbent assembly 60 to the front and back panels, 12 and 36 respectively, the absorbent assembly 60 is capable of moving downward away from the user's torso while the front and back panels, 12 and 36 respectively, maintain their snug position against the user's torso. This unique ability for the absorbent assembly 60 to move outward and downward away from the user's torso without undue restrictions from the front and back panels, 12 and 36 respectively, produces a useful undergarment. The absorbent assembly 60 is capable of taking in and retaining additional body fluid as it moves out away from the user's body.

The attachments 78 and 80 can be by various means and can include permanent attachments as well as removable or releasable attachments. Desirably, the attachments 78 and 80 are permanent attachments where they are not designed to be removed without destroying the bond. The attachments 78 and 80 can be formed by using glue, adhesive, ultrasonic bonds, heat bonds, pressure bonds, heat and pressure bonds, a combination of any of the aforementioned, etc. The attachments 78 and 80 can also include a mechanical fastener, such as by sewing with thread, using buttons and button holes, using snaps, by employing hook and loop fasteners, etc. A hook and loop fastener is generally considered a releasable attachment. One type of hook and loop fastener is VELCRO® wherein a hook material is releasably engaged into a loop material. VELCRO® is a registered trademark of Velcro USA, Inc. having an office at 406 Brown Avenue, Manchester, New Hampshire 03103.

The attachments 78 and 80 can be formed along a continuous line or over a surface area having a predetermined length and width. Alternatively, the attachments 78 and 80 can consist of intermittent point bonds that are spaced apart from one another. For example, the intermittent point bonds can be formed by using a hot or cold melt adhesive or by forming ultrasonic bonds. Various bond formations can be used which are known to those skilled in the art. Desirably, the attachments 78 and 80 are formed using intermittent bonds.

Referring again to Figs. 3 and 4, one will notice that the absorbent assembly 60 is positioned to overlay the second zones 16 and 40 of the front and back panels, 12 and 36 respectively. Each of the second zones 16 and 40 can have the same width dimension or a width of a different dimension. Desirably, each of the second zones 16 and 40 has a width of the same dimension. The width of the absorbent assembly 60 can be greater

WO 2004/108041

PCT/US2004/008432

than, equal to or less than the width of either of the second zones 16 and 40. However, the absorbent assembly 60 is secured only to the second zones 16 and 40 so as not to extend and retract with the movement of the first zones 14 and 38 of the front and back panels, 12 and 36 respectively. This method of attachment will assure that the absorbent assembly 60 remains relatively stationary while the front and back panels, 12 and 36 respectively, are capable of extending and retracting in correspondence to movement of the user's torso. In Figs. 3 and 4, one will also notice that the absorbent assembly 60 is positioned such that a greater portion of it is located over the back panel 36 than over the front panel 12. This placement of the absorbent assembly 60 over a greater portion of the back panel 36 provides a better functioning disposable absorbent article 10, especially one that is designed to absorb both body fluid from the penis or vagina, as well as solid and semi-solid excrement from the anus. In addition, the front panel 12 is usually smaller in size than the back panel 36. This size difference also influences the placement of the absorbent assembly 60 over a greater portion of the back panel 36. The result is that the first end 70 of the absorbent assembly 60 is secured to the front panel 12 at a location that is closer to the second end 24 of the front panel 12 than it is to the first end 22. Likewise, the second end 72 of the absorbent assembly 60 is secured to the back panel 36 at a location that is closer to the second end 48 of the back panel 36 than to the first end 46.

Referring now to Figs. 3-6, one will notice that when the absorbent assembly 60 is secured to the front and back panels, 12 and 36 respectively, a crotch region 82 is formed. The crotch region 82 separates the front panel 12 from the back panel 36 and is designed to cover the perineum area of the wearer. The crotch region 82 can cover a distance of a few inches in an infant diaper to several inches in an adult incontinence garment. For example, a crotch region 82 in an infant diaper may range from about 2 inches (about 5 centimeters(cm)) to about 10 inches (about 25 cm); while in an adult incontinence garment, the crotch region 82 may range from about 6 inches (about 15 cm) to about 20 inches (about 51 cm).

The absorbent assembly 60 can be stretchable or non-stretchable in relation to the front and back panels, 12 and 36 respectively. Desirably, the absorbent assembly 60 is non-stretchable in relation to the front and back panels, 12 and 36 respectively. By having the absorbent assembly 60 be non-stretchable in relation to the front and back panels, 12 and 36 respectively, it is meant that the absorbent assembly 60 will not stretch appreciably in the longitudinal or transverse directions. For example, the absorbent assembly 60 will have less than about 50% of the stretch of the front and/or back panels,

WO 2004/108041

PCT/US2004/008432

12 and/or 36 respectively. Desirably, the absorbent assembly 60 will have less than about 25% of the stretch of the front and/or back panels, 12 and/or 36 respectively. More desirably, the absorbent assembly 60 will have less than about 10% of the stretch of the front and/or back panels, 12 and/or 36 respectively. Most desirably, the absorbent  
5 assembly 60 will have less than about 5% of the stretch of the front and/or back panels, 12 and/or 36 respectively.

The reason for making the absorbent assembly 60 non-stretchable is that the front and back panels, 12 and 36 respectively, are elastically stretchable and can expand and contract to snugly conform to the user's anatomy, especially to the wearer's torso. The  
10 absorbent assembly 60 is designed not to expand and contract as the front and back panels, 12 and 36 respectively, stretch or retract since the absorbent assembly 60 is bonded to the non-extensible and non-retractable second zones 16 and 40. This feature allows the absorbent assembly 60 to remain positioned over the user's perineum. As the absorbent assembly 60 receives body fluid and/or excrement discharged by the wearer, it  
15 will be displaced outward and downward, away from the user's torso. The ability of the absorbent assembly 60 to move outward away from the user's torso as additional body fluid is absorbed and retained is a direct result of the fact that it is not restricted from such movement in the crotch region 82 by the front or back panels, 12 and 36 respectively. The attachments 78 and 80 assure that the absorbent assembly 60 covers the perineum  
20 but is capable of moving outward away from the torso as additional body fluid is received and retained.

Referring now to Figs. 1, 3 and 6, the disposable absorbent article 10 also has at least one elastic member 84 positioned adjacent to and aligned approximately parallel to each of the first and second side edges 74 and 76 of the absorbent assembly 60. Each of  
25 the elastic members 84 is situated between the bodyside liner 62 and the outer cover 64. The elastic members 84 provide a gasket to hold the first and second side edges, 74 and 76 respectively, of the absorbent assembly 60 against the user's body. Each of the elastic members 84 can be in the form of an elastic strand, ribbon or strip. Desirably, from two to six elastic members 84 will be positioned adjacent to each of the first and  
30 second side edges, 74 and 76 respectively. In Figs. 3 and 6, two elastic members 84 are shown positioned adjacent to each of the first and second side edges, 74 and 76 respectively. The elastic members 84 are shown as having a round cross-sectional configuration although various other geometrical configurations can be utilized. The elastic members 84 extend parallel to the longitudinal central axis X-X and extend

WO 2004/108041

PCT/US2004/008432

completely through the crotch region 82. Desirably, the ends of the elastic members 84 will be located within the front and back panels, 12 and 36 respectively.

Referring again to Figs. 1-4, the absorbent assembly 60 is capable of being folded transversely, approximate the transverse central axis Y-Y, to enable the first and second side edges 26 and 28 of the front panel 12 to align with the first and second side edges 50 and 52 of the back panel 36, respectively. A pair of seams 88 and 90 is then formed to join the front panel 12 to the back panel 36. The seam 88 secures the second side edge 28 of the front panel 12 to the second side edge 52 of the back panel 36 while the seam 90 secures the first side edge 26 of the front panel 12 to the first side edge 50 of the back panel 36. One will notice that Fig. 3 is an open view of the interior of the disposable absorbent article 10 and the front panel 12 is folded along the transverse central axis Y-Y such that the front panel 12 lies over the top of the back panel 36. After folding and forming the pair of seams 88 and 90, the disposable absorbent article 10 shown in Fig. 1 is obtained. The disposable absorbent article 10 has a waist opening 92 and a pair of leg openings 94 and 96. Since the front and back panels, 12 and 36 respectively, are formed from a stretchable elastic material, the waist opening 92 and the pair of leg openings 94 and 96 can expand or contract in size to accommodate the anatomy of the user.

#### Method

Referring now to Fig. 7, a flow diagram is depicted showing a method of manufacturing the disposable absorbent article 10. The method includes the steps of forming a front panel 12 having a first zone 14 and a second zone 16. The first zone 14 is extensible and retractable and the second zone 16 is non-extensible and non-retractable. The front panel 12 also has an inner surface 18, an outer surface 20, a first side edge 26 and a second side edge 28. Furthermore, the second zone 16 is spaced inward from the first and second side edges, 26 and 28 respectively. The method also includes forming a back panel 36 having a first zone 38 and a second zone 40. The first zone 38 is extensible and retractable and the second zone 40 is non-extensible and non-retractable. The back panel 36 also has an inner surface 42, an outer surface 44, a first side edge 50 and a second side edge 52. Furthermore, the second zone 40 of the back panel 36 is spaced inward from the first and second side edges, 50 and 52 respectively, of the back panel 36. The method further includes forming an absorbent assembly 60 having a liquid pervious bodyside liner 62, a liquid-impervious outer cover 64, and an absorbent 66 positioned therebetween. The absorbent assembly 60 has a first end 70 and a second end 72 and the absorbent assembly 60 is secured to the front and back panels, 12 and 36 respectively. The first end 70 of the absorbent assembly 60 is secured to the second

WO 2004/108041

PCT/US2004/008432

zone 16 of the front panel 12 and the second end 72 of the absorbent assembly 60 is secured to the second zone 40 of the back panel 36. The absorbent assembly 60 can be secured to either the inner or outer surfaces 18 and 42 or 20 and 44 of the front and back panels, 12 and 36 respectively. The absorbent assembly 60 is capable of being folded to enable the first and second side edges, 26 and 28 respectively, of the front panel 12 to align with the first and second side edges 50 and 52 respectively, of the back panel 36. Lastly, the method includes joining the front and back panels, 12 and 36 respectively, together by a pair of seams 88 and 90 at the first and second side edges 74 and 76 to form a disposable absorbent article 10 having a waist opening 92 and a pair of leg openings 94 and 96.

While the invention has been described in conjunction with a specific embodiment, it is to be understood that many alternatives, modifications and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, this invention is intended to embrace all such alternatives, modifications and variations that fall within the spirit and scope of the appended claims.



WO 2004/108041

PCT/US2004/008432

We claim:

1. A disposable absorbent article comprising:

- 5 a) a front panel having a first zone and a second zone, said first zone being extensible and retractable and said second zone being non-extensible and non-retractable, said front panel also having a first side edge and a second side edge, and said second zone is spaced inward from said first and second side edges;
- 10 b) a back panel having a first zone and a second zone, said first zone being extensible and retractable and said second zone being non-extensible and non-retractable, said back panel also having a first side edge and a second side edge, and said second zone of said back panel is spaced inward from said first and second side edges of said back panel;
- 15 c) an absorbent assembly including a liquid pervious bodyside liner, a liquid-impervious outer cover, and an absorbent positioned therebetween, said absorbent assembly having a first end and a second end, said absorbent assembly being secured to said front and back panels, said first end of said absorbent assembly being secured to said second zone of said front panel and said second end of said absorbent assembly being secured to said second zone of said back panel, and said absorbent assembly capable of being folded to enable said first and second side edges of said front panel to align with said first and second side edges of said back panel; and
- 20 d) a pair of seams joining said front and back panels together at said first and second side edges to form a disposable absorbent article having a waist opening and a pair of leg openings.

25 2. The disposable absorbent article of claim 1 wherein each of said second zones is formed from the same material as said first zone but does not possess extensible and retractable properties.

30 3. The disposable absorbent article of claim 1 wherein said second zone of said front panel has a smaller surface area than said first zone of said front panel.

4. The disposable absorbent article of claim 3 wherein said second zone of said front panel has a surface area that is less than about 25% of the surface area of said first zone.

35 5. The disposable absorbent article of claim 4 wherein said second zone of said front panel has a surface area that is less than about 20% of the surface area of said first zone.

WO 2004/108041

PCT/US2004/008432

6. The disposable absorbent article of claim 1 wherein said front panel has an inner surface and said absorbent assembly is secured to said inner surface, and said front panel has a first end and a second end and said first end of said absorbent assembly is  
5 secured at a location that is closer to said second end of said front panel.

7. The disposable absorbent article of claim 1 wherein said back panel has an inner surface and said absorbent assembly is secured to said inner surface, and wherein said second zone of said back panel has a smaller surface area than said first zone of said  
10 back panel.

8. The disposable absorbent article of claim 7 wherein said second zone of said back panel has a surface area that is less than about 30% of the surface area of said first zone.

15 9. The disposable absorbent article of claim 1 wherein said second zone of said back panel has a larger surface area than said second zone of said front panel.

10. A disposable absorbent article comprising:

a) a front panel having a first zone and a second zone, said first zone being  
20 extensible and retractable and said second zone being non-extensible and non-retractable; said front panel also has a first side edge and a second side edge, and said second zone is spaced inward from said first and second side edges;

b) a back panel having a first zone and a second zone, said first zone being  
25 extensible and retractable and said second zone being non-extensible and non-retractable, said back panel also has a first side edge and a second side edge, said second zone of said back panel is spaced inward from said first and second side edges of said back panel, and said second zone of said back panel has a larger surface area than said second zone of said front panel;

c) an absorbent assembly including a liquid pervious bodyside liner, a liquid-  
30 impervious outer cover, and an absorbent positioned therebetween, said absorbent assembly having a first end, a second end, a first side edge and a second side edge, said absorbent assembly being secured to said front and back panels, said first end of said absorbent assembly being secured to said second zone of said front panel and said second end of said absorbent assembly being secured to said second zone of said back  
35 panel, and said absorbent assembly capable of being folded to enable said first and

WO 2004/108041

PCT/US2004/008432

second side edges of said front panel to align with said first and second side edges of said back panel; and

5 d) at least one elastic member positioned adjacent to each of said first and second side edges of said absorbent assembly and situated between said bodyside liner and said outer cover; and

e) a pair of seams joining said first and second side edges of said front and back panels together to form a disposable absorbent article having a waist opening and a pair of leg openings.

10 11. The disposable absorbent article of claim 10 wherein said back panel has an inner surface and said absorbent assembly is secured to said inner surface, and said second zone of said back panel has a larger surface area than said second zone of said front panel.

15 12. The disposable absorbent article of claim 10 wherein said front panel has an inner surface and said absorbent assembly is secured to said inner surface, and said front panel has a first end and a second end and said first end of said absorbent assembly is secured at a location that is closer to said second end of said front panel.

20 13. The disposable absorbent article of claim 10 wherein said back panel has a first end and a second end and said second end of said absorbent assembly is secured at a location that is closer to said second end of said back panel.

25 14. The disposable absorbent article of claim 10 wherein said second zone of said front panel is rectangular in configuration.

15. The disposable absorbent article of claim 10 wherein said second zone of said back panel is rectangular in configuration.

30 16. A method of forming a disposable absorbent article comprising the steps of:  
a) forming a front panel having a first zone and a second zone, said first zone being extensible and retractable and said second zone being non-extensible and non-retractable;

WO 2004/108041

PCT/US2004/008432

- b) forming a back panel having a first zone and a second zone, said first zone being extensible and retractable and said second zone being non-extensible and non-retractable;
- c) forming an absorbent assembly having a liquid pervious bodyside liner, a liquid-impervious outer cover, and an absorbent positioned therebetween;
- d) securing said absorbent assembly to said second zones of said front and back panels;
- e) folding said absorbent assembly so that said front panel is positioned over said back panel; and
- f) joining said front and back panels together by a pair of seams to form a disposable absorbent article having a waist opening and a pair of leg openings.

17. The method of claim 16 wherein each of said front and back panels has an inner surface and said absorbent assembly is secured to said inner surfaces of said front and back panels.

18. The method of claim 16 wherein each of said front and back panels has an outer surface and said absorbent assembly is secured to said outer surfaces of said front and back panels.

19. The method of claim 16 wherein said second zone of said front and back panels are extended before said absorbent assembly is secured thereto.

20. The method of claim 16 wherein said second zone of said front and back panels are not extended before said absorbent assembly is secured thereto.

WO 2004/108041

1/5

PCT/US2004/008432

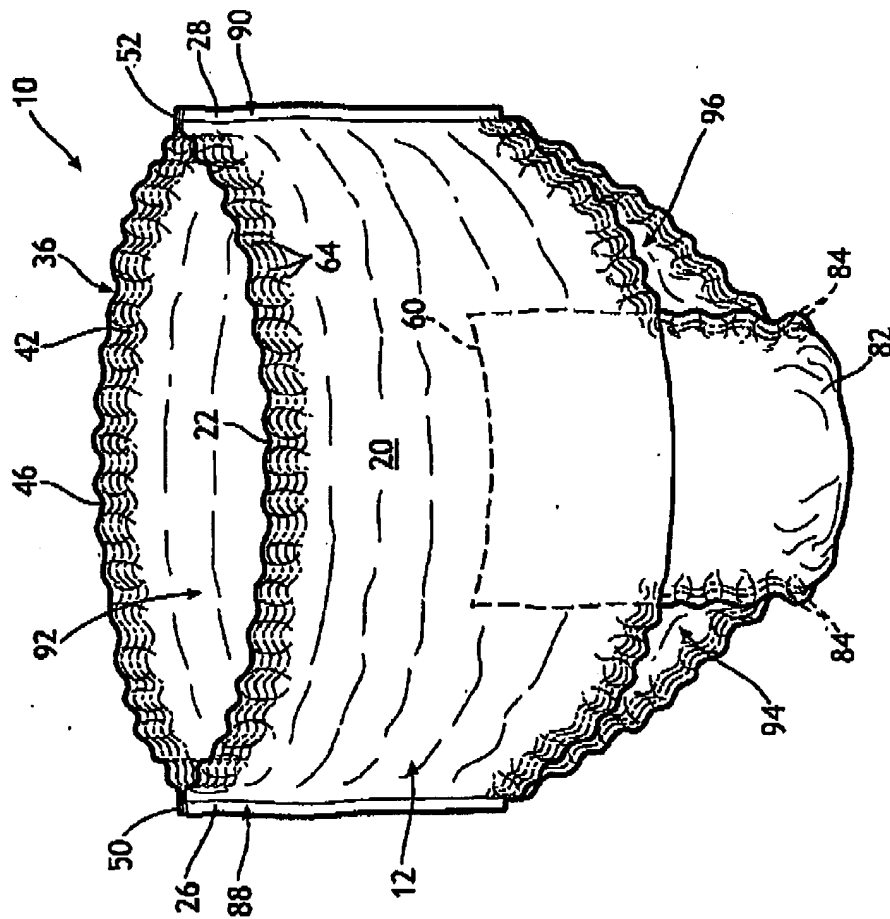


FIG. 1

WO 2004/108041

PCT/US2004/008432

2/5


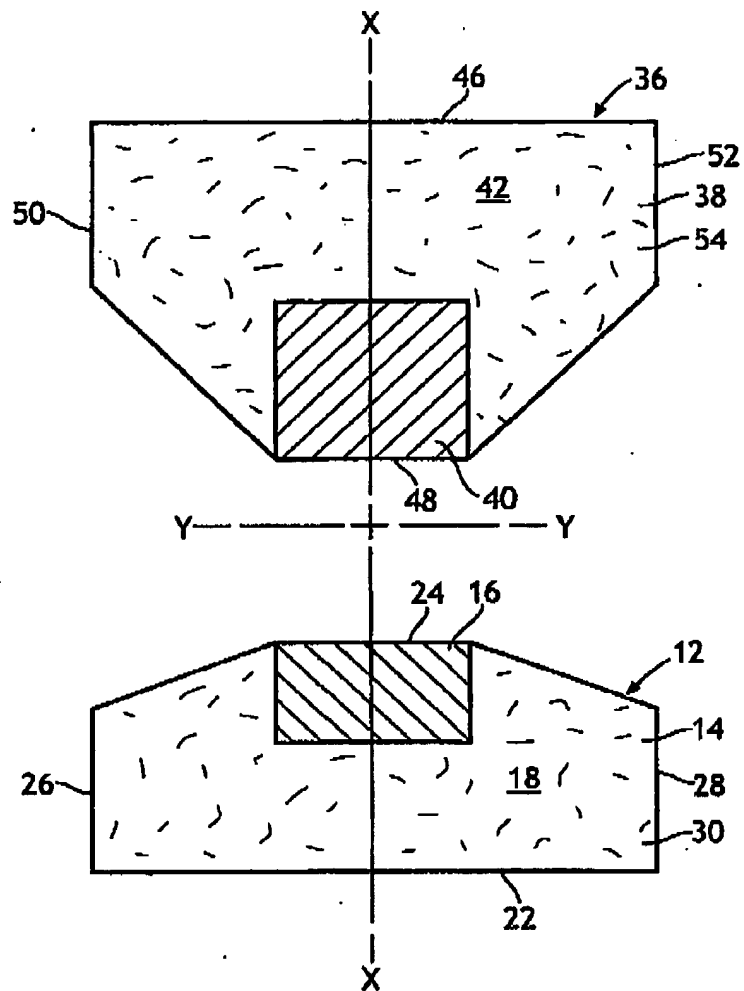


FIG. 2

**WO 2004/108041**

**PCT/US2004/008432**

**3/5**

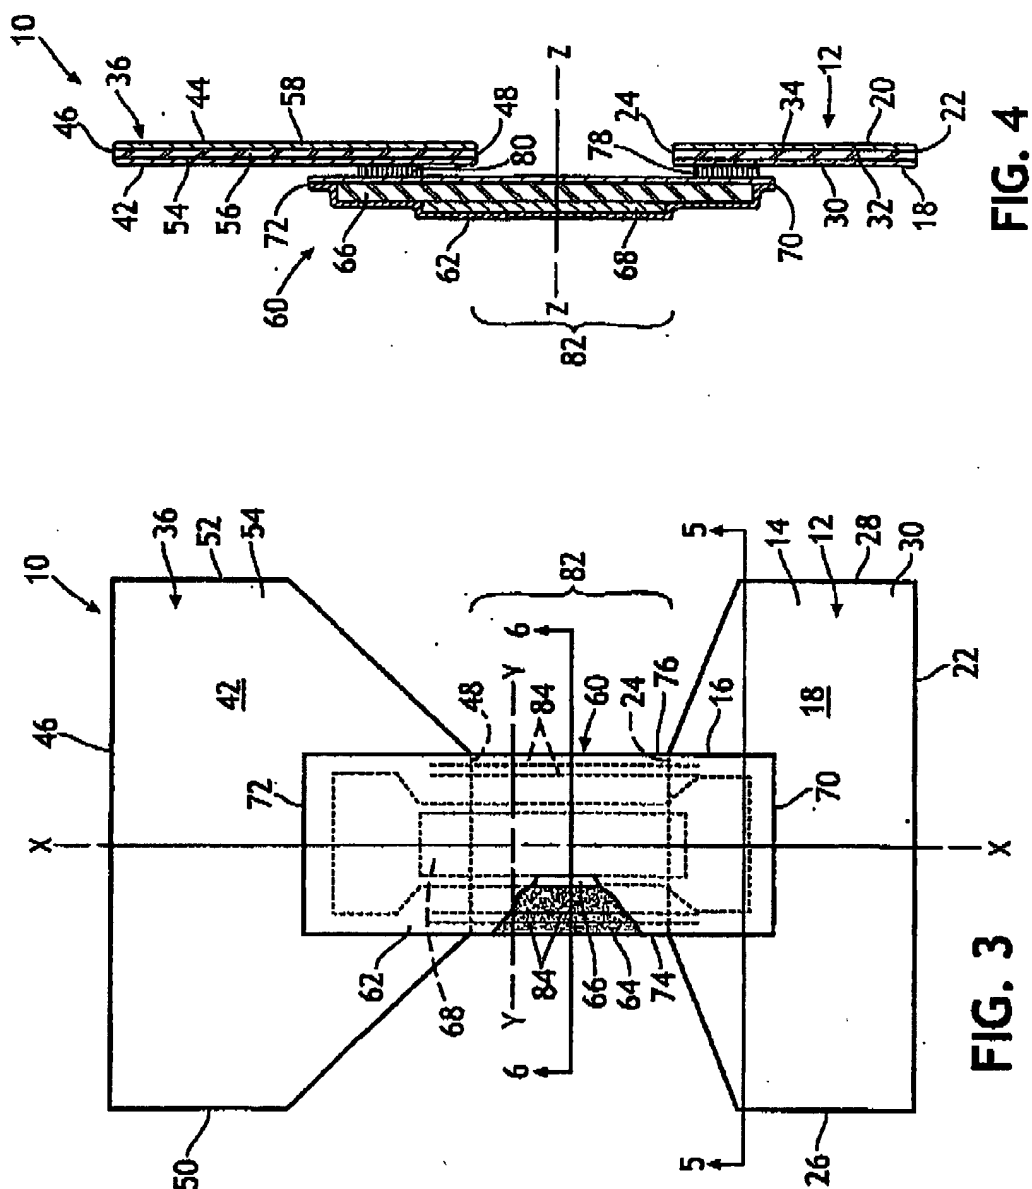

WO 2004/108041

4/5

PCT/US2004/008432

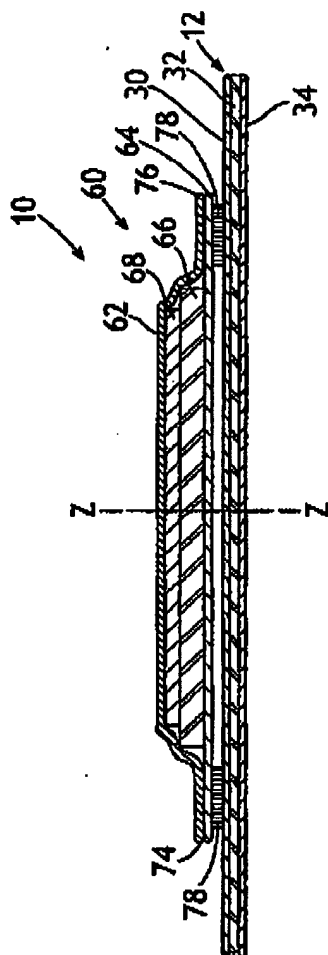


FIG. 5

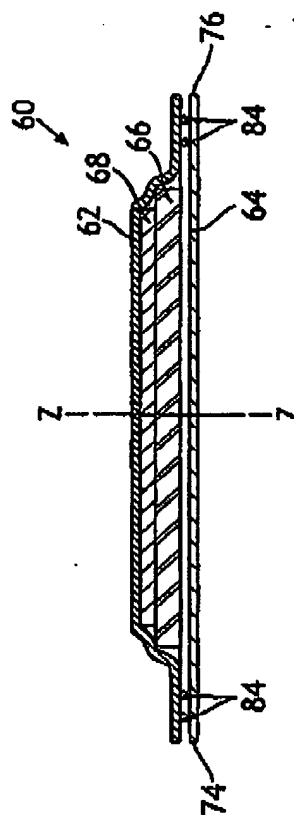


FIG. 6



WO 2004/108041

5/5

PCT/US2004/008432

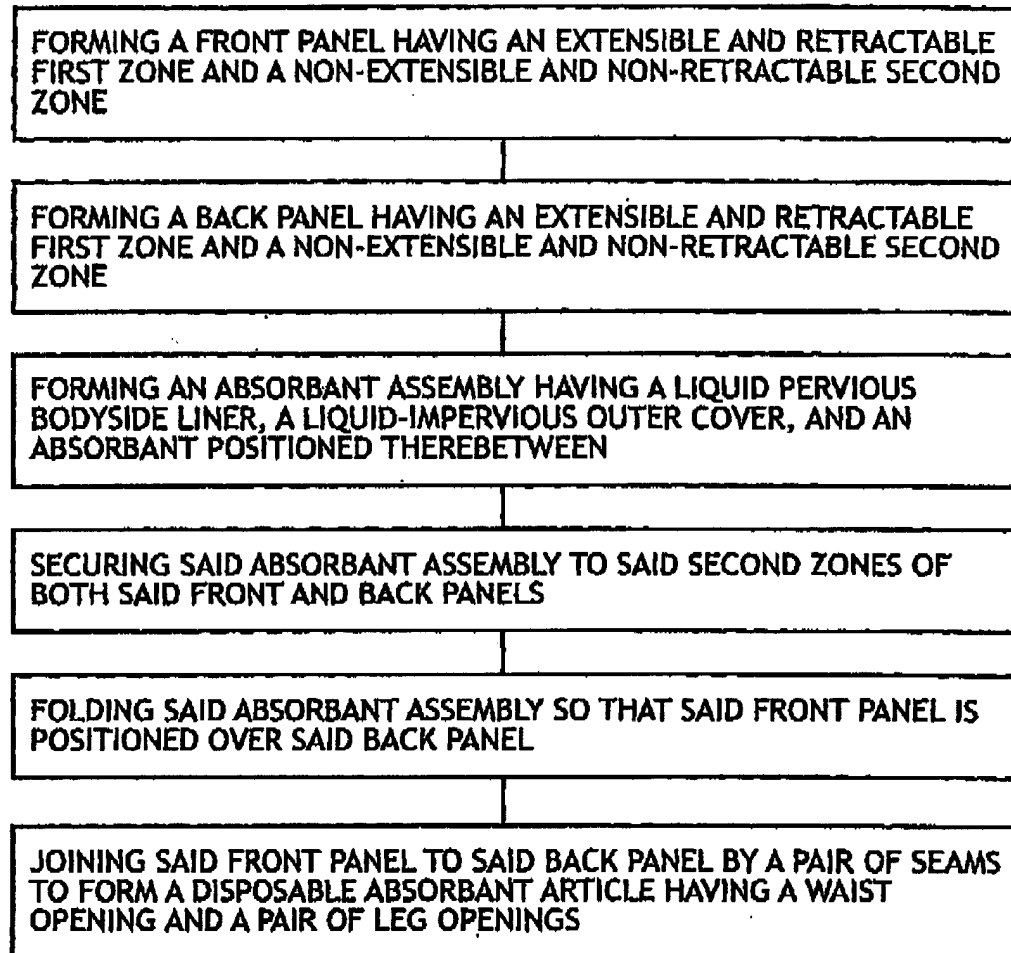


FIG. 7

## INTERNATIONAL SEARCH REPORT

International Application No.

US2004/008432

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61F13/496

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 03/039423 A (KIMBERLY CLARK CO) 15 May 2003 (2003-05-15) page 8, line 8 - page 10, line 27; figures 29,30	1-20
A	US 6 313 372 B1 (SUZUKI MEGAKU) 6 November 2001 (2001-11-06) column 24, line 13 - line 29	1
A	US 5 947 948 A (DREIER KIMBERLY ANN ET AL) 7 September 1999 (1999-09-07) column 27, line 19 - line 33	1
A	WO 02/074213 A (MORI YOSUKE ; DAIO SEISHI KK (JP); SAIGA HIDEKI (JP); TORIGOSHI KEIJI) 26 September 2002 (2002-09-26) abstract; figures	1
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

15 September 2004

Date of mailing of the international search report

22 SEP 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentplan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl  
Fax: (+31-70) 340-9018

Authorized officer

Mirza, A

## INTERNATIONAL SEARCH REPORT

International Application No

US2004/008432

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	& EP 1 374 814 A (DAIO SEISHI KK ; DAIO PAPER CONVERTING CO LTD (JP)) 2 January 2004 (2004-01-02) -----	1

Form PCT/ISA/210 (continuation of second sheet) (January 2004)

page 2 of 2

## INTERNATIONAL SEARCH REPORT

International Application No

/US2004/008432

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03039423	A	15-05-2003	US 2003088230 A1 CA 2463880 A1 EP 1448140 A1 WO 03039423 A1	08-05-2003 15-05-2003 25-08-2004 15-05-2003
US 6313372	B1	06-11-2001	CA 2175571 A1 JP 3100300 B2 JP 7252762 A WO 9519258 A1	20-07-1995 16-10-2000 03-10-1995 20-07-1995
US 5947948	A	07-09-1999	US 5554145 A US 2002128617 A1 US 6325787 B1 AU 700813 B2 AU 1746395 A BR 9506912 A CA 2182873 A1 CN 1144472 A ,B CZ 9602469 A3 DE 69510923 D1 DE 69510923 T2 DK 748197 T3 EG 20605 A EP 0748197 A1 ES 2133741 T3 FI 963355 A GR 3030842 T3 HK 1012934 A1 HU 77402 A2 JP 9509350 T JP 2002330994 A NO 963555 A SG 44635 A1 TR 28798 A WO 9522951 A1 US 5556394 A US 5554143 A US 5569232 A US 5554144 A US 5749866 A ZA 9501648 A	10-09-1996 12-09-2002 04-12-2001 14-01-1999 11-09-1995 16-09-1997 31-08-1995 05-03-1997 15-01-1997 26-08-1999 20-01-2000 29-11-1999 30-09-1999 18-12-1996 16-09-1999 28-08-1996 30-11-1999 23-06-2000 28-04-1998 22-09-1997 19-11-2002 25-10-1996 19-12-1997 25-03-1997 31-08-1995 17-09-1996 10-09-1996 29-10-1996 10-09-1996 12-05-1998 13-11-1996
WO 02074213	A	26-09-2002	JP 2002272783 A JP 2002273808 A JP 2002272784 A EP 1374814 A1 WO 02074213 A1 US 2004133180 A1	24-09-2002 25-09-2002 24-09-2002 02-01-2004 26-09-2002 08-07-2004
EP 1374814	A	02-01-2004	JP 2002272783 A JP 2002273808 A JP 2002272784 A EP 1374814 A1 US 2004133180 A1 WO 02074213 A1	24-09-2002 25-09-2002 24-09-2002 02-01-2004 08-07-2004 26-09-2002

Form PGT/ISA/210 (patent family annex) (January 2004)